

Pre amplificador de pared PXM-1 con dos entradas con control de volumen independiente para cada una de ellas:

- Entrada MIC (XLR) balanceada simétrica con alimentación phantom de 12 Vdc (Seleccionable).
- Entrada AUX (Jack ST 3,5mm) asimétrica.

Dispone además de una salida simétrica a nivel de 0 dBm, lo que le permite una conexión directa y sin pérdidas con cualquier amplificador o etapa de potencia. Esta salida es capaz de soportar más de 200-250 metros de cable de señal balanceada.

Tanto su diseño mecánico como electrónico han sido desarrollados bajo criterios de funcionalidad, robustez y fiabilidad, cumpliendo con los requisitos de cualquier instalación profesional de sonorización.

Gracias a su formato mural, el PXM-1 se integra fácilmente en todo tipo de espacios, ofreciendo una solución compacta y discreta.

Además, su instalación resulta sencilla y rápida, permitiendo al instalador optimizar tiempos y garantizar un acabado profesional.

El diseño sobrio y funcional del PXM-1, lo hace ideal tanto para aplicaciones en entornos corporativos, educativos y comerciales, como en espacios de uso público donde se quiera un control local de audio fiable y duradero.




Características técnicas

Salida de señal 0 dBm	
Banda pasante	50 Hz. a 18 Khz.
Distorsión	< 0,1%.
Consumo máximo	1,5W
Alimentación	12 Vdc / 0,1A
Entrada MIC - XLR	
Sensibilidad	2 mV
Impedancia	600Ω
Alimentación phantom seleccionable	12 Vdc
Entrada AUX - Jack 3,5mm	
Sensibilidad	200 mV
Impedancia	100 KΩ
Material	Acero inox
Dimensiones	138 x 80 x 43 mm
Peso	0,5Kg

ACCESORIOS INCLUIDOS

- Embellecedor para montaje empotrado (color blanco)
- Cajetín universal para montaje empotrado.

MONTAJE EMPOTRADO

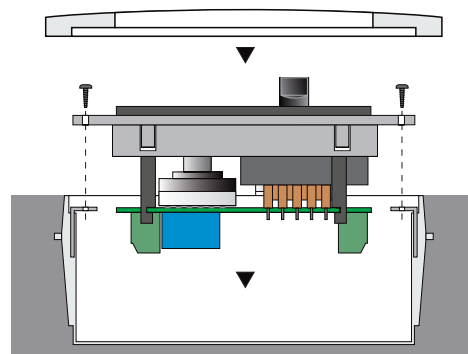

ACCESORIOS OPCIONALES

- Fondo para montaje en superficie. Ref. UDE 800.079
- Fuente de alimentación conmutada 12V UDE ref. WZ-6.

Wall-mounted preamplifier - 2 inputs

PXM-1 wall-mounted preamplifier with two inputs, each with independent volume control:

- Balanced symmetrical MIC input (XLR) with 12 Vdc phantom power (selectable)
- Unbalanced AUX input (3.5 mm jack).

It also has a symmetrical 0 dBm level output, allowing direct, lossless connection to any amplifier or power stage. This output can support more than 200-250 metres of balanced signal cable.

Both its mechanical and electronic design have been developed with functionality, robustness and reliability in mind, meeting the requirements of any professional sound system installation.

Thanks to its wall-mounted format, the PXM-1 can be easily integrated into all types of spaces, offering a compact and discreet solution.

In addition, it is quick and easy to install, allowing the installer to optimise time and ensure a professional finish.


The sober and functional design of the PXM-1 makes it ideal for applications in corporate, educational and commercial environments, as well as in public spaces where reliable and durable local audio control is desired.



Technical characteristics

OdBm signal output	
Frequency response	50 Hz. a 18 Khz.
Distortion	< 0,1%.
Maximum power consumption	1,5W
Power supply	12 Vdc / 0,1A
MIC input - XLR	
Sensitivity	2 mV
Impedance	600Ω
Selectable phantom power	12 Vdc
AUX input - 3.5mm jack	
Sensitivity	200 mV
Impedance	100 KΩ
Material	Steel inox
Dimensions	138 x 80 x 43 mm
Weight	0,5Kg

Flush-mounted installation

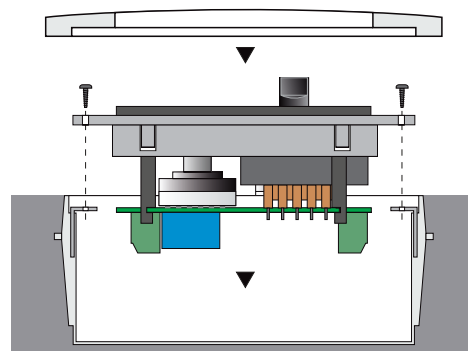

INCLUDED ACCESSORIES

- Trim for flush mounting (white)
- Universal box for flush mounting.

OPTIONAL ACCESSORIES

- Surface mounting base. Ref. UDE 800.079
- 12V switching power supply UDE ref. WZ-6.