

AP-960A

2-Way wall mount speaker (30W + 30W)



AP-960A




AP-960P



AP-960A – 2-Way Active Wall Mount Speaker. 30W + 30W

AP-960P - 2-Way Passive Wall Mount Speaker.

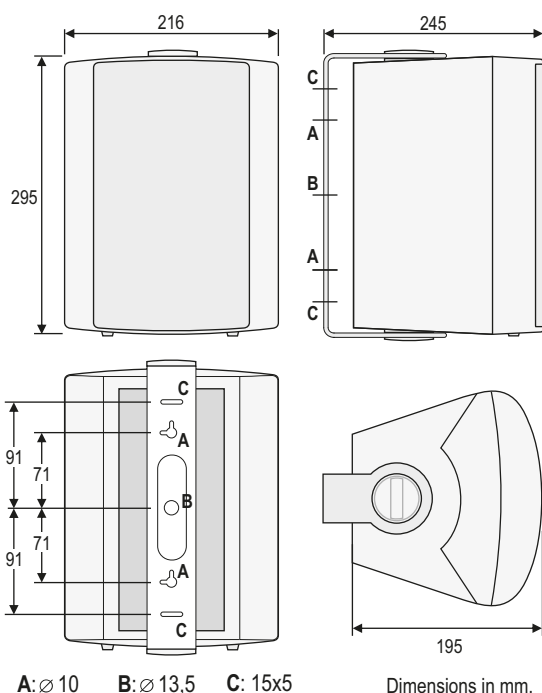

TECHNICAL CHARACTERISTICS

Amplifier:	30 + 30 W RMS
Speakers:	1 polypropylene woofer (6") 1 tweeter (1½")
Frequency Response:	70-20.000 Hz
Inputs:	1 stereo balanced input (Euroblock) 1 stereo unbalanced input (2 x RCA) 1 stereo unbalanced input (Jack 3.5mm)
Outputs:	8 ohms (Euroblock) for Passive Speaker AP-960P
SPL (1W/1kHz/1m):	95 dB
Control Knobs:	Volume Bass: ±10 dB at 100 Hz Treble: ±10 dB at 10.000 Hz
Color:	White
Power Supply:	230 VAC - 50/60 Hz.
Weight:	4,7 kg (Active Speaker) 3,2 kg (Passive Speaker)
Accessories:	Steerable wall brackets



EQUIPOS Y SISTEMAS MEGAFONÍA/INTERCOM • PUBLIC ADDRESS SYSTEMS

UNIÓN DESARROLLOS ELECTRÓNICOS

Tel.: +34 934 772 854 / +34 609 914 787 • ude@udeaudio.com • BARCELONA - SPAIN

www.udeaudio.com


rev.0 | 610.497a | 1 / 2

1 ON / OFF. ON/OFF switch for the device.

2 230 VAC. Connector and power supply fuse (T1.0A / 250V)

3 SPEAKER OUTPUT

Amplified output to connect to the passive speaker (8 ohms)



4 STEREO / PARALELL Switch

▲ STEREO Selection (Switch Not Pressed)

▼ PARALLEL Selection – Mono (Switch Pressed)



5 LED Indicators

● POWER - AC Power Supply Indication (blue)


● SIG R - Right Channel Signal's Modulation (green)

● SIG L - Left Channel Signal's Modulation (green)


6 Balanced INPUT – Right Channel



7 Balanced INPUT – Left Channel

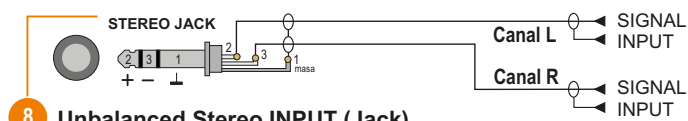

8 Unbalanced Stereo INPUT (Jack)

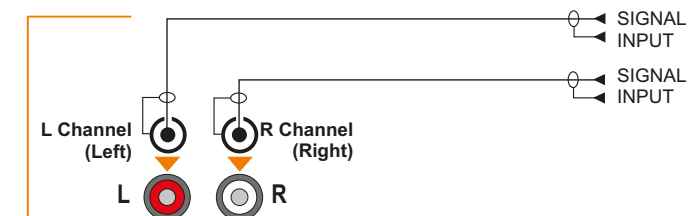


9 Unbalanced Stereo INPUT (2 x RCA))

10 General Volume


11 Treble control

12 Bass control

REAR PANEL – ACTIVE SPEAKER

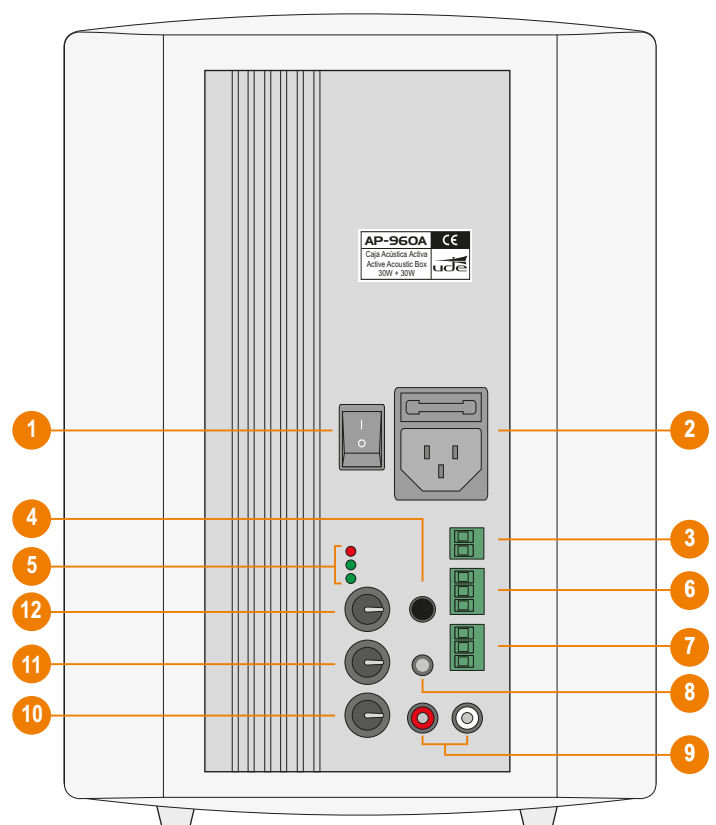

REAR PANEL – PASSIVE SPEAKER

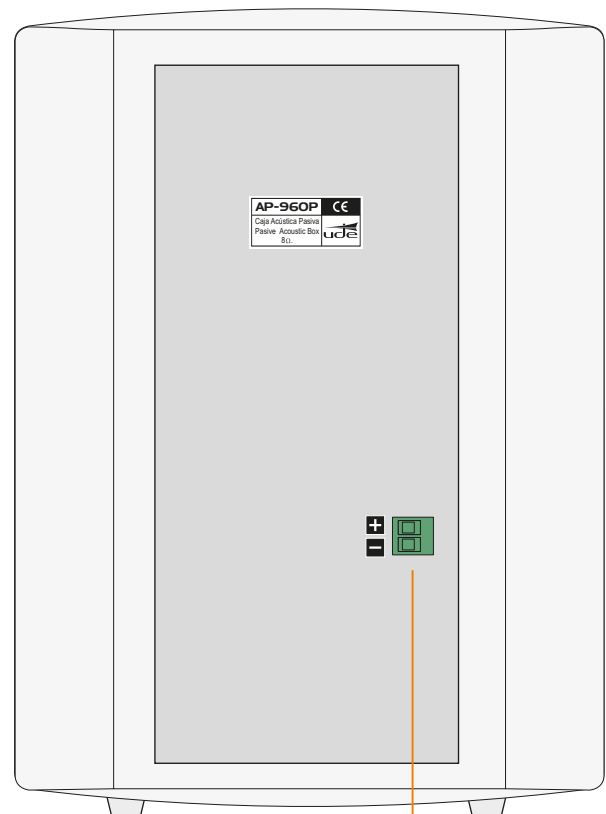

SPEAKER INPUT
Speaker's line input
(connection to active speaker AP-960A)