


BG-50/40T

40W Exponential loudspeaker

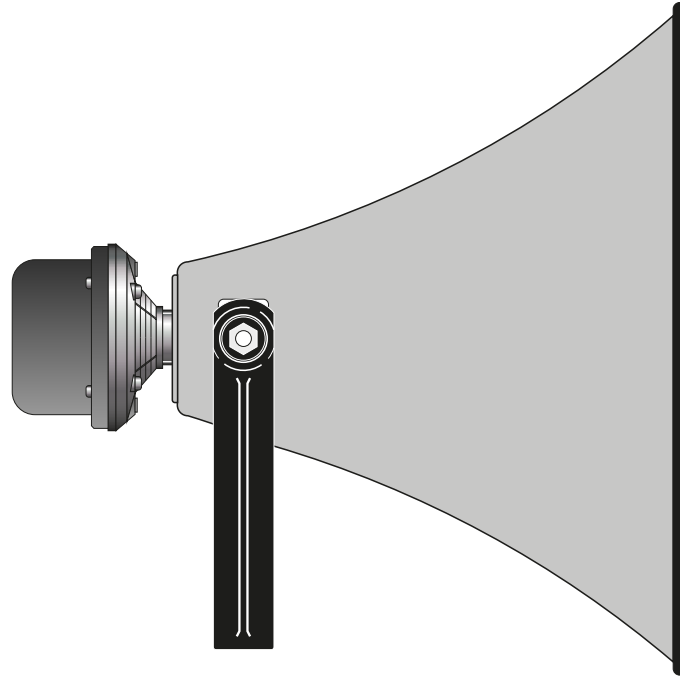


Technical characteristics

- Rated power:	40 W.
- Sensitivity:	110/125 dB SPL 1 W/40 W.
- Frequency range:	160 - 11000 Hz.
- Impedance:	100 V Line transformer.
- Opening angle:	50°.
- IP Rate:	IP-54.
- Weight:	4,3 Kg.
- Power selection (línea 100 V.):	10/20/40 W.

POWER SELECTION

L. 100V			
+		-	
40W	20W	10W	Común Common
250 Ω	500 Ω	1 KΩ	
AZUL BLUE	AMARILLO YELLOW	BLANCO WHITE	ROJO RED

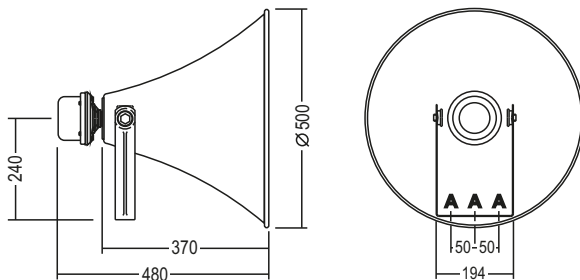

BG-50/40T

Horn: BG-50

Driver Unit: SD-40T

A = 3 DRILL HOLES FOR FIXING (∅ 11 mm.)

SCREWS: STAINLESS STEEL

MEASUREMENTS IN MILLIMETRES



EQUIPOS Y SISTEMAS MEGAFONÍA/INTERCOM • PUBLIC ADDRESS SYSTEMS
UNIÓN DESARROLLOS ELECTRÓNICOS

Tel.: +34 934 772 854 / +34 609 914 787 • ude@udeaudio.com • BARCELONA - SPAIN

www.udeaudio.com

rev.1 | 610.056a | 1 / 1