


# BG-50/60T

60W Exponential loudspeaker

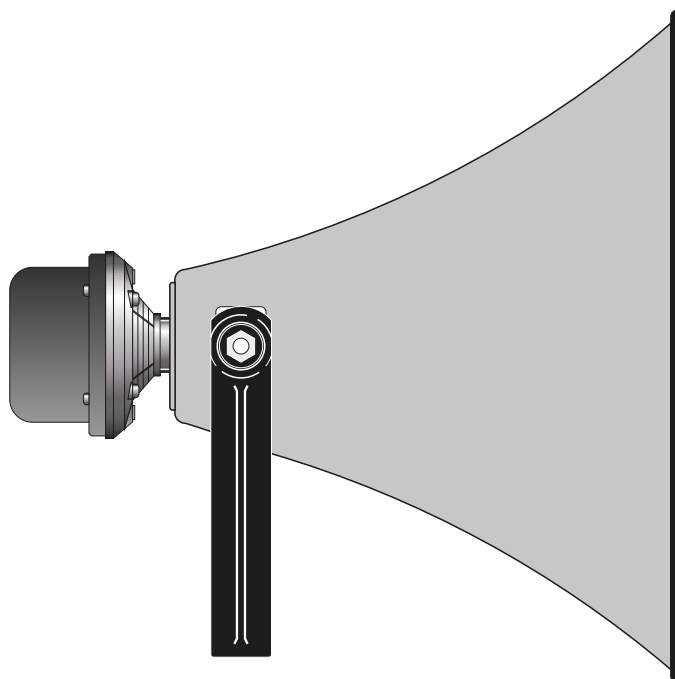


## Technical characteristics

- Rated power	60 W.
- Sensitivity	110/118 dB SPL 1 W/60 W.
- Frequency range	160 - 11000 Hz.
- Impedance	100 V. line transformer.
- Opening angle	50°.
- IP Rate	IP-54
- Weight	4,4 Kg.
- Power selection (100 V. line)	15/30/60 W.

### POWER SELECTION

L. 100V			
+		-	
<b>60W</b>	<b>30W</b>	<b>15W</b>	Común Common
167 $\Omega$	333 $\Omega$	666 $\Omega$	
AZUL BLUE	AMARILLO YELLOW	BLANCO WHITE	ROJO RED

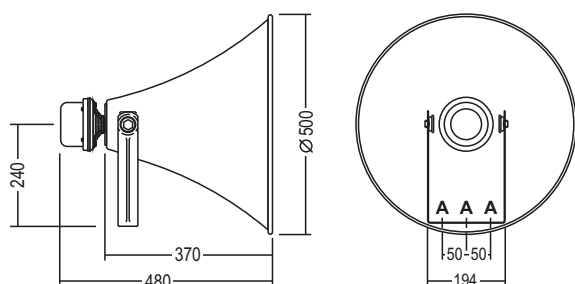

## BG-50/60T

Horn: BG-50

Driver Unit: SD-60T

A = 3 DRILL HOLES FOR FIXING ( $\varnothing$  11 mm.)

SCREWS: STAINLESS STEEL

MEASUREMENTS IN MILLIMETRES



EQUIPOS Y SISTEMAS MEGAFONÍA/INTERCOM • PUBLIC ADDRESS SYSTEMS

**UNIÓN DESARROLLOS ELECTRÓNICOS**

Tel.: +34 934 772 854 / +34 609 914 787 • ude@udeaudio.com • BARCELONA - SPAIN

[www.udeaudio.com](http://www.udeaudio.com)

rev.1 | 610.057a | 1 / 1