
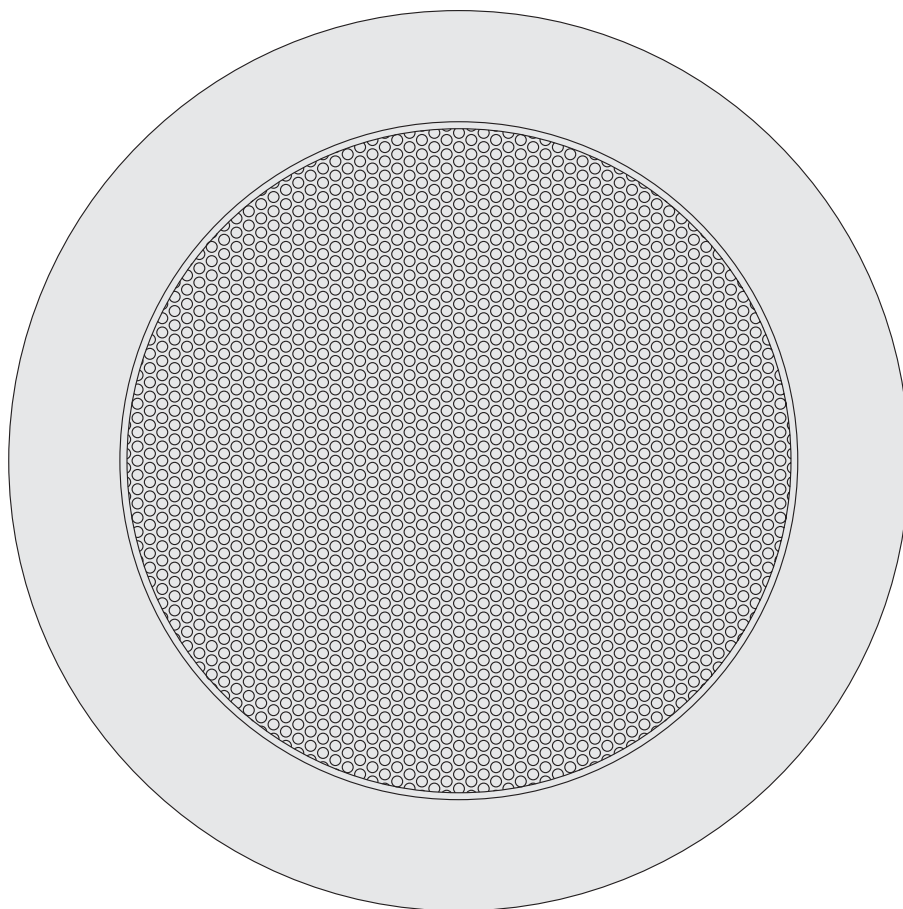


AP-1218


METALLIC CEILING LOUDSPEAKER (6") WITH FIREDOME

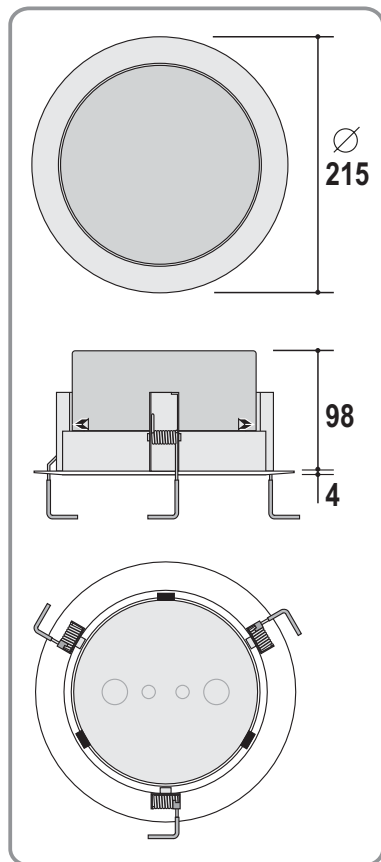

TECHNICAL FEATURES


- Rated power: **5-2-1-0,5-0,25W rms. L100V.**
- Loudspeaker's diameter: **6".**
- Frequency range: **85 to 18.000 Hz.**
- Sensitivity: **92 dB 1 W./1 m./1 KHz.**

- Dispersion: **160°.**
- Material / colour: **Lacquered steel / Ral White 9010.**
- Connection: **Screw terminals (ceramic terminal block).**
- Weight: **1,350 Kgs.**

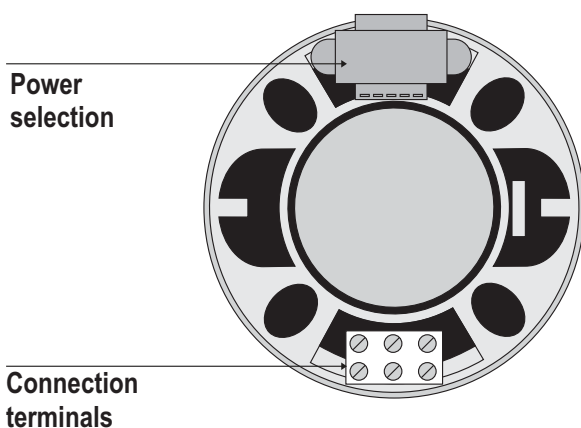

POWER SELECTION

L.100V	
W	Ω
5	2K
2	5K
1	10K
0,5	20K
0,25	40K

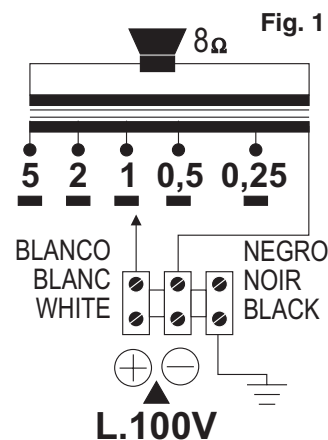

EQUIPOS Y SISTEMAS MEGAFONÍA / INTERCOM • PUBLIC ADDRESS SYSTEMS

UNIÓN DESARROLLOS ELECTRÓNICOS

Tel.: +34 934 772 854 / +34 609 914 787 • ude@udeaudio.com • BARCELONA - SPAIN




www.udeaudio.com



rev.0 610.286A 1 / 2

UDE se reserva el derecho de variar las características técnicas de sus productos sin previo aviso • UDE reserves the right to modify the technical characteristics of its products without previous notice

1


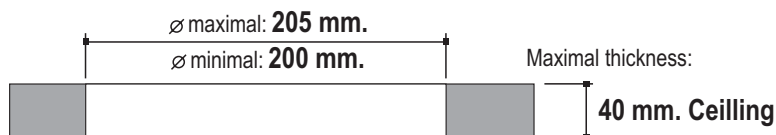


2






Remove the loudspeaker from the external body making a slight counter clockwise rotation.

3






Remove the dome, pressing the iron straps "A", and slide it in the interior of the external body.

4

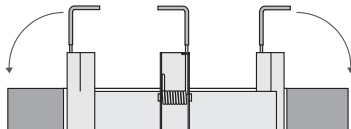



Place the springs "B" in their retaining anchors and introduce the hoop (without the dome) in the hole made in the ceiling. Then release the springs.

5

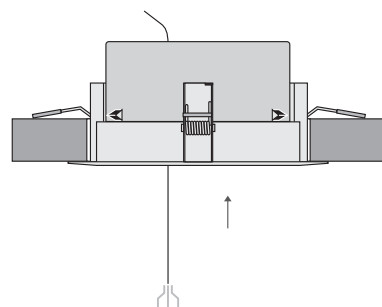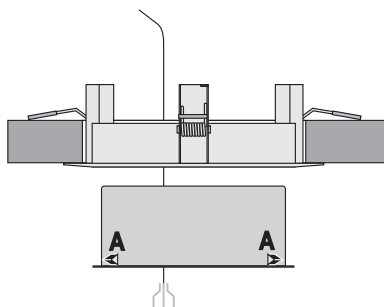

Open the required drill hole in the dome according to the cable or tube that is being used. Introduce the connecting lead in the tube and then introduce the dome in the interior of the enclosure until it gets fixed by the iron-straps "A".

6

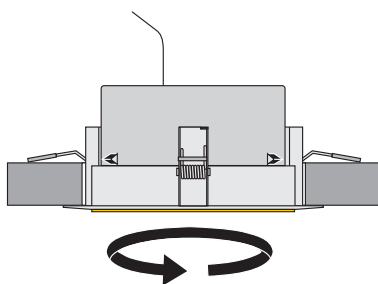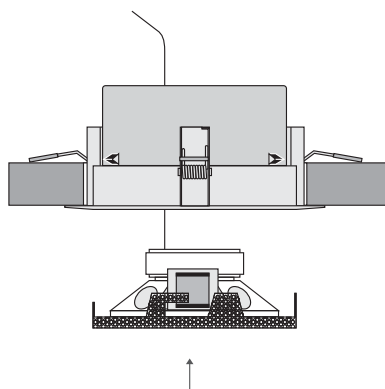

Connect the leads in the terminals "R" and select the power of the transformer "T" of the ceiling loudspeaker (fig. 1). Introduce the ceiling loudspeaker in the interior of the hoop and make a slight clockwise until it gets completely fixed.