



The MX-555M main control panel allows the management of the system thanks to its touch screen. It allows to select for each of the 5 sources the audio to be broadcasted for each zone independently.


The panel also allows certain configuration settings such as: date and time setting, screen lock or password change.

- ✓ Configurable touch screen operation
- ✓ Audio level indicator.
- ✓ Local DC power supply
- ✓ RJ45 and RS232 system control interface.

Technical characteristics

Power supply	24V DC (Supports power supply from MX-500 matrix)
Maximum wiring length	Connected to RJ45 Matrix: 500m Connected to RS232 matrix: 15m Connected to RS232 with RS485 converter: 1Km
Conexión a matriz	RJ45 / RS232 (Euroblock)
Terminales	Power supply 24V / Ground / RS232 / RS485 (For third party control) / Audio output 1W/8 Ohms or balanced signal
Funciones	Function 5 zones / 4 inputs + local. Volume and tones
Montaje	Embedded / Surface
Dimensiones	86 x 86 x 38mm
Peso	128gr

Optional accessories
- Embedded box.
Ref. UDE 305.306

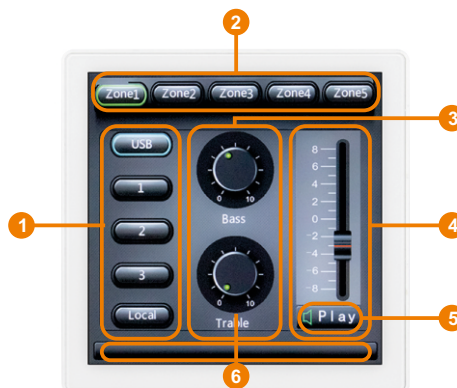

1. Selection of audio inputs
2. Zone selection. From 1 to 5 zones
3. Treble / Bass adjustment
4. Audio level adjustment
5. Zone Play / Mute
6. Configuration