




The MX-555M main control panel allows the management of the system thanks to its touch screen. It allows to select for each of the 5 sources the audio to be broadcasted for each zone independently.

The panel also allows certain configuration settings such as: date and time setting, screen lock or password change.

- ✓ Configurable touch screen operation
- ✓ Audio level indicator.
- ✓ Local DC power supply
- ✓ RJ45 and RS232 system control interface.

## Technical characteristics

<b>Power supply</b>	24V DC (Supports power supply from MX-500 matrix)
<b>Maximum wiring length</b>	<b>Connected to RJ45 Matrix:</b> 500m <b>Connected to RS232 matrix:</b> 15m <b>Connected to RS232 with RS485 converter:</b> 1Km
<b>Conexión a matriz</b>	RJ45 / RS232 (Euroblock)
<b>Terminales</b>	Power supply 24V / Ground / RS232 / RS485 (For third party control) / Audio output 1W/8 Ohms or balanced signal
<b>Funciones</b>	Function 5 zones / 4 inputs + local. Volume and tones
<b>Montaje</b>	Embedded / Surface
<b>Dimensiones</b>	86 x 86 x 38mm
<b>Peso</b>	128gr

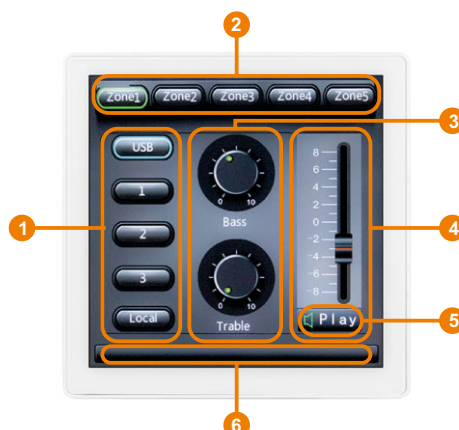

1. Selection of audio inputs
2. Zone selection. From 1 to 5 zones
3. Treble / Bass adjustment
4. Audio level adjustment
5. Zone Play / Mute
6. Configuration