

The MX-555S control panel allows you to manage the audio of the zone in which the panel is associated.



It allows you to manage the volume, audio source selection, as well as mute or send a local audio signal to the speakers in the zone to which the panel is associated.

- ✓ Signal indicator for operating status.
- ✓ Allows selection of up to five zones and selection of all zones.
- ✓ AUX / MIC / CARILLON input with individual level adjustment.
- ✓ RJ45 input for connection to MX-500 central unit.
- ✓ DC 24V power supply.



Technical characteristics

DC Power supply	24V DC (Supports power supply from MX-500 matrix)
Max. cable length	500m
Connection	RJ45
Terminals	24V Power supply / Local AUX input
Controls	Audio sources 1-4 (USB), local, mute, Volume +/-
Installation	Embedded / Surface mounted
Dimensions	86 x 86 x 38mm
Weight	128gr

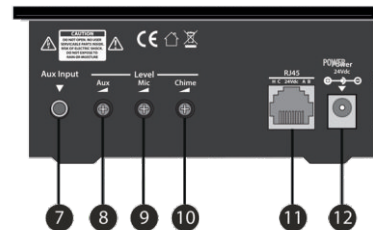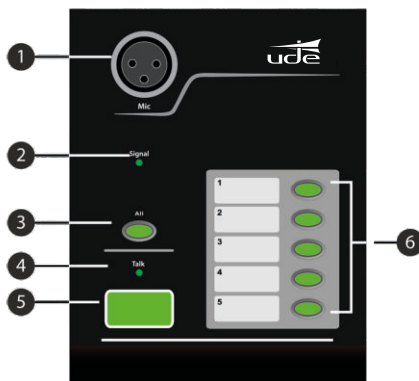

- | | | | |
|-------------------------|--------------------------|---------------------------------|-------------------------------------|
| 1. Microphone connector | 4. "Speak" LED indicator | 7. AUX Input | 10. Chime volume adjustment |
| 2. LED signal indicator | 5. "Speak" Push button | 8. AUX input volume adjustment | 11. RJ45 connector to MX-500 matrix |
| 3. "All zones" button | 6. Zone selection | 9. Microphone volume adjustment | 12. 24V DC input |