

AP-820EN

Two way wall mount speaker



EN54-24




- ✓ Commercial PA system wall mount speaker with transformer.
- ✓ Ideal for school, offices, hotel, airports, etc.
- ✓ Compliant with the EN54-24 standards.
- ✓ Impact-resistant & UV-resistant ABS plastic housing.
- ✓ IP55 rated against adverse weather conditions
- ✓ Integrated thermal fuse, 95°C fire-resistant cable and fire resistant cone.
- ✓ Power outputs 20W / 10W / 5W / 2.5W + 8Ω with power selector.
- ✓ Quick installation by supplied stainless mounting bracket.



Technical specifications

Model	AP-820EN
Description	Two Way Acoustic Box
Power output	20W / 10W / 5W / 2.5W + 8Ω
Line Output	100V / 70V or 8Ω
Frequency Response	100-20KHz
SPL(@1W/m)	88dB
Speakers	4" woofer and 1" tweeter
IP Rate	IP55
Dimensions	245×170×140mm
Material	ABS plastic housing with metal grill in white.
Installation	"U" stainless mounting bracket
Weight	2.5kg

Technical reference: WSK-420HWEN

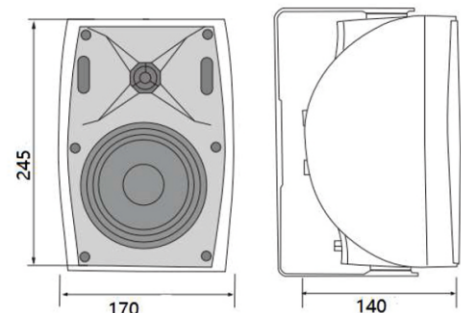

Warning: If the loudspeaker is connected to L100V, do not set the switch to position 5 and 6 under any circumstances. It will cause damage to the loudspeaker and the power amplifier to which it is connected.

The Ground connection is only necessary in certain circumstances if RF problems exist.



EQUIPOS Y SISTEMAS MEGAFONÍA/INTERCOM • PUBLIC ADDRESS SYSTEMS
UNIÓN DESARROLLOS ELECTRÓNICOS

Tel.: +34 934 772 854 / +34 609 914 787 • ude@udeaudio.com • BARCELONA - SPAIN

www.udeaudio.com

rev.2 | 610.634A | 1 / 1




- ✓ Caja acústica con transformador para sistema de avisos.
- ✓ Ideal para escuelas, oficinas, hoteles, aeropuertos, etc.
- ✓ Cumple con la Norma EN54-24.
- ✓ Carcasa de plástico ABS resistente a impactos y rayos UV.
- ✓ Protección IP55 contra inclemencias meteorológicas.
- ✓ Fusible térmico integrado, cable y cono resistente al fuego.
- ✓ Potencias de salida de 20W / 10W / 5W / 2.5W / + 8Ω con selector rotativo.
- ✓ Instalación rápida mediante escuadra de fijación de acero inox.



Características técnicas

Modelo	AP-820EN
Descripción	Caja acústica 2 vías
Potencias	20W / 10W / 5W / 2.5W + 8Ω
Salida línea	100V / 70V o 8Ω
Respuesta de frecuencia	100-20KHz
SPL(@1W/m)	88dB
Altavoces	Woofer de 4" y tweeter de 1"
Rango IP	IP55
Dimensiones	245×170×140mm
Material	Carcasa de plástico ABS con rejilla metálica en blanco
Montaje	Soporte en "U" de acero inoxidable
Peso	2.5kg

Referencia técnica: WSK-420HWEN

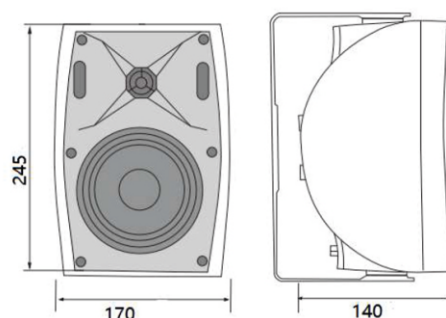

Nota importante: Si el altavoz está conectado en L100V, no situar el conmutador en ningún caso en la posición 5 y 6. Causará daños en el altavoz y la etapa de potencia a la que está conectado.

La conexión G solo es necesaria en determinadas circunstancias si existen problemas de RF.