

Pupitre microfónico para emisión de anuncios y mensajes sobre IP



UDEVAC-6100

EN 54-16

Pupitre de avisos para sistema de megafonía y evacuación por voz UDEVAC-6100.

Permite la selección de zonas/grupos, monitoreo de zonas, ajuste de volumen y visualización del estado en pantalla táctil de 7 pulgadas.

Soporta entrada de audio externa, transmisión vía Ethernet con conexión redundante y control de prioridades.

Salida de monitor de audio y altavoz de monitor integrado.

Incluye micrófono flexible.

Permite ser configurado como micrófono de explotación, o como micrófono de seguridad, protegido con password.

Características técnicas

Pantalla

Dimensiones	7 pulgadas
Resolución	1024 x 600
Ángulo de visión	Completo
Pantalla táctil	Capacitativa

Alimentación DC

Voltaje	DC24V, 18-31V adaptable
Corriente máxima	0.5A
Consumo máximo	12W
Consumo máximo en reposo	9W

Entrada Línea

Sensibilidad	775mV
Impedancia Entrada	10kΩ

Conexión

Conexion LAN	Redundante (2x RJ45). FTP CAT6
--------------	--------------------------------

Entrada MIC


Micrófono	Flexo de 415mm
Tipo	Electret
Sensibilidad	10mV
Impedancia	250Ω

Salida Altavoz Monitor

Potencia	0.7V
Potencia de Salida	30mW (16-32Ω auriculares)
Respuesta en frecuencia	200Hz~16KHz
Distorsión	<0.3% (Potencia nominal), 1KHz
Relación Señal / Ruido	>70dB

Altavoz monitor

Potencia de salida	1.5W
Impedancia	4Ω

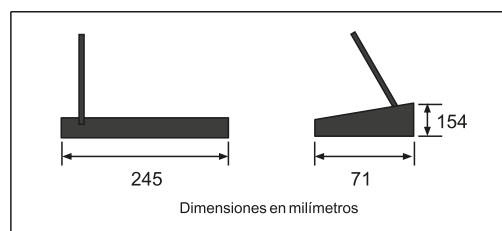

Desk Microphone for Announcements and Messages over IP



UDEVAC-6100

EN 54-16

Announcement desk for the UDEVAC-6100 PA and voice evacuation system.

Allows zone/group selection, zone monitoring, volume adjustment, and status display on a 7-inch touch screen.

Supports external audio input, Ethernet transmission with redundant connection, and priority control.

Monitor audio output and integrated monitor speaker.

Includes a flexible microphone.

Can be configured as an operational microphone or as a security microphone, password protected.

Technical characteristics

Display

Dimensions	7 inches
Resolution	1024 x 600
Viewing angle	Full
Touchscreen	Capacitive

DC Power Supply

Voltage	DC24V, 18-31V adaptable
Maximum current	0.5A
Maximum consumption	12W
Maximum standby consumption	9W

Line Input

Sensitivity	775mV
Input impedance	10kΩ

Connection

LAN Connection	Redundant (2x RJ45). FTP CAT6
----------------	-------------------------------

MIC input

Microphone	Gooseneck de 415mm
Type	Electret
Sensitivity	10mV
Impedance	250Ω

Speaker monitor output

Voltage	0.7V
Output Power	30mW (16-32Ω headphones)
Frequency Response	200Hz~16KHz
Distortion	<0.3% (Rated Power), 1KHz
Signal-to-Noise Ratio	>70dB

Altavoz monitor

Output Power	1.5W
Impedance	4Ω

