



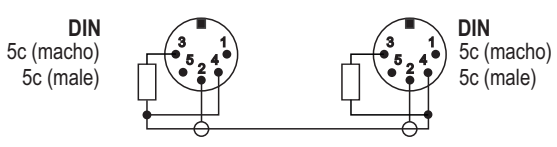
**CA-01 / CA-13 / CA-02 / CA-07 /
CA-14 / CA-03 / CA-04 / CA-05 /
CA-06 / CA-08 / CA-09 / CA-10 /
CA-11 / CA-12 / CA-31 / CA-32 /
CA-33**




CA-01 L= 1 m.

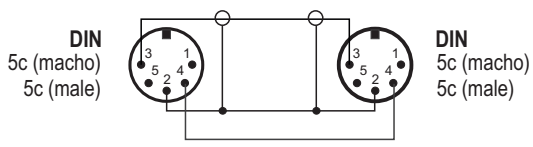


-Uso general.
-General purpose.




CA-02 L= 1 m.




- Uso especial para suma de potencias - 2xAX-109 (100W+100W)
- Joining lead - 2xAX-109 (100W+100W)

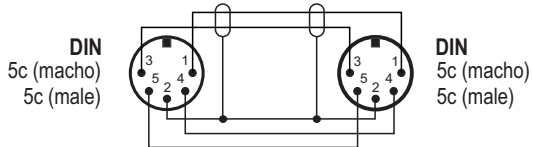


CA-03 L= 1 m.




-Uso general.
-General purpose.

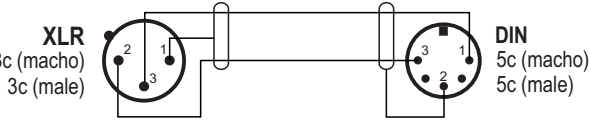


CA-04 L= 10 m.
CA-05 L= 20 m.
CA-11 L= 1,5 m.




-Uso general.
-General purpose.

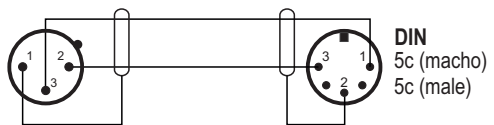


CA-06 L= 10 m.
CA-07 L= 20 m.



-Uso general.
-General purpose.

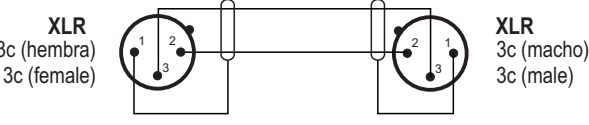

CA-08 L= 10 m.
CA-09 L= 20 m.
CA-12 L= 1,5 m.



-Uso general / Cable simétrico.
-General purpose / Balanced lead

XLR
5c (hembra)
5c (female)

DIN
5c (macho)
5c (male)

CA-10 L= 10 m.

-Cable simétrico con telemandos para CM-800.
-Balanced lead with remote controls for CM-800.

DIN
5c (macho)
5c (male)

DIN
5c (macho)
5c (male)

CA-13 L= 1,5 m.

-Uso general / Cable simétrico con telemando.
-General purpose / Balanced lead with remote controls.

DIN
5c (macho)
5c (male)

S
B

A
U

DIN
5c (macho)
5c (male)

CA-14 L= 1,5 m.

-Conversión de señal simétrica (S) en asimétrica (A).
-Balanced (B) signal to unbalanced (U) converter lead.

DIN
5c (macho)
5c (male)

JACK
Ø6.35 mm.

CA-31 L= 1 m.

-Cable unión EG-31 con AX-PX / Juego de 2 unidades.
-EG-31 union cable with AX- PX / Set of 2 units.

DIN
5c (macho)
5c (male)

JACK
Ø6.35 mm.

JACK
Ø6.35 mm.

CA-32 L= 1 m.

-Cable inserción EG-31 en AX-209, AX-309, AX-459.
-Insertion lead EG-31 to amplifiers AX-209, AX-309, AX-459.

DIN
5c (macho)
5c (male)

CINCH

CINCH

CA-33 L= 1,5 m.

-Para fuentes musicales.
-For musical sources.