

- Potencia controlada (L. 100V):	10 W
- Material:	Metal
- Atenuación (conmutador rotativo sin fin):	5 saltos de 8 dB y OFF
- Restablecimiento de nivel:	Si
- Tensión telemando (prioridad avisos a 4 hilos):	24 VDC
- Dimensiones:	116 x 80 x 44 mm.
- Peso:	150 gr.
- Montaje:	Empotrado / Superficie



- Puissance contrôlée (L. 100V):	10 W
- Matière:	Métal
- Atténuation (commutateur rotatif sans fin):	5 seuils de 8 dB et OFF
- Rétablissement de niveau:	Oui
- Tension Télécommande (priorité a 4 fils):	24 VDC
- Dimensions:	116 x 80 x 44 mm.
- Poids:	150 gr.
- Montage:	Encastrer / Surface


**ATENUADOR PARA ALTAVOCES
DE ALTA IMPEDANCIA**
con dispositivo de prioridad a los avisos
(4 hilos)

**ATTENUATEUR POUR HAUT-PARLEURS
A HAUTE IMPEDANCE**
avec dispositif pour diffusion de messages prioritaires
(4 fils)

- Controlled power (100V L.):	10 W
- Material:	Metal
- Attenuation (endless rotative selector):	5 steps of 8 dB and OFF
- Level restoration:	Yes
- Remote control voltage (4 wires):	24 VDC
- Dimensions:	116 x 80 x 44 mm.
- Weight:	150 gr.
- Mounting:	Embedded / Surface mounted


**ATTENUATOR FOR HIGH IMPEDANCE
SPEAKERS**
with level restoration device
(4 wires)

CAJETIN DE EMPOTRAR UW-94
(ACCESORIO OPCIONAL)
BOÎTE D'ENCASTREMENT UW-94
(ACCESOIRES OPTIONNEL)
UW-94 FLUSH MOUNTING BOX
(OPTIONAL ACCESSORY)

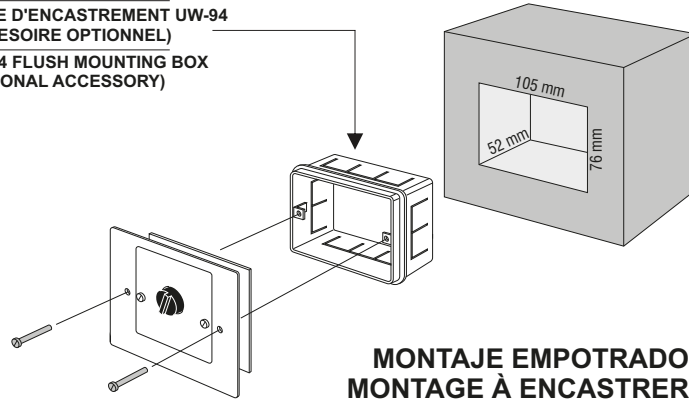

MONTAJE EMPOTRADO
MONTAGE À ENCASTRER
FLUSH MOUNTING

CAJETIN DE SUPERFICIE UW-84
(ACCESORIO OPCIONAL)
BOÎTE DE SURFACE UW-84
(ACCESOIRES OPTIONNEL)
UW-84 SURFACE MOUNTING BOX
(OPTIONAL ACCESSORY)

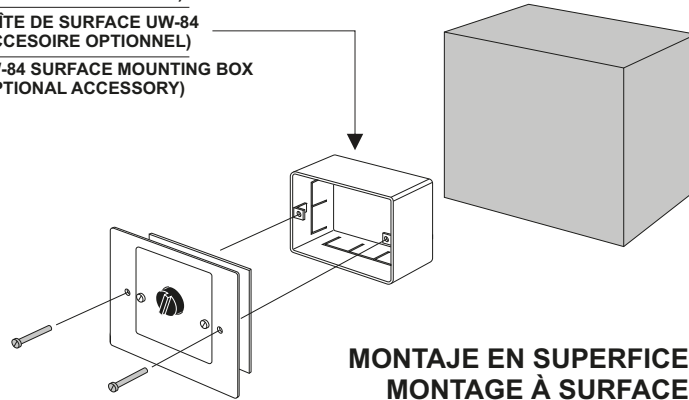

MONTAJE EN SUPERFICIE
MONTAGE À SURFACE
SURFACE MOUNTING

CONEXIONADO
Sin sistema de prioridad
BRANCHEMENT
Sans priorité de messages
CONNECTION
Without level restoration

CONEXIONADO
Con sistema de prioridad (4 hilos)
BRANCHEMENT
Avec priorité de messages (4 fils)
CONNECTION
With level restoration (4 wires)

