

# AP-120EN

## 2-way 20W Ceiling speaker



EN54-24



- Compliant with the EN54-24 standards fireproof ceiling speaker
- Nominal power of 20-10-5-2,5W and 8Ω.
- Transformer 100V/70V and 8Ω.
- 5.25" woofer and 1" Mylar teeter.
- ABS plastic enclosure, metal grille with white dome.
- Fire resistant Euroblock terminal, thermal fuse, fire resistant dome and fire resistant cable.
- Quick and safe ceiling installation.



### Technical specifications

<b>Model</b>	AP-120EN
<b>Description</b>	EN54-24 Ceiling Speaker
<b>Power output</b>	20-10-5-2.5W & 8Ω
<b>Line Output</b>	100V & 8Ω
<b>Frecuency Response</b>	100-20KHz
<b>SPL(@1W/m)</b>	86±3dB
<b>Speaker</b>	5.25" woofer and 1" Mylar tweeter
<b>Cutout Size</b>	Ø 170mm
<b>Dimensions</b>	Ø 203×145mm
<b>Material</b>	ABS enclosure, metal grille with fire dome in white
<b>Weight</b>	1.7kg

Technical reference: CSK-520KEN

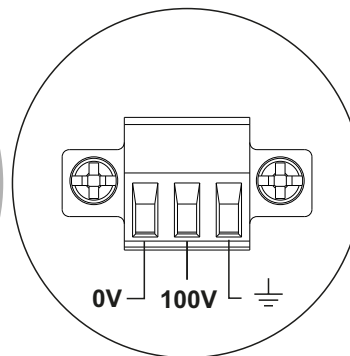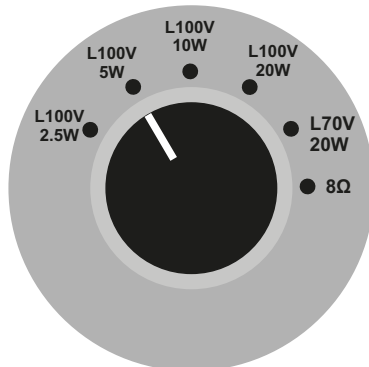

EQUIPOS Y SISTEMAS MEGAFONÍA / INTERCOM • PUBLIC ADDRESS SYSTEMS  
**UNIÓN DESARROLLOS ELECTRÓNICOS**

Tel.: +34 934 772 854 / +34 609 914 787 • ude@udeaudio.com • BARCELONA - SPAIN

[www.udeaudio.com](http://www.udeaudio.com)

rev.2 | 610.557a | 1 / 1