
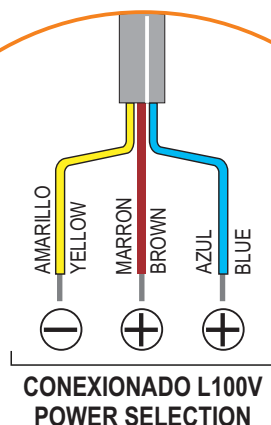



PROYECTOR ACÚSTICO BIDIRECCIONAL BIDIRECTIONAL SOUND PROJECTOR

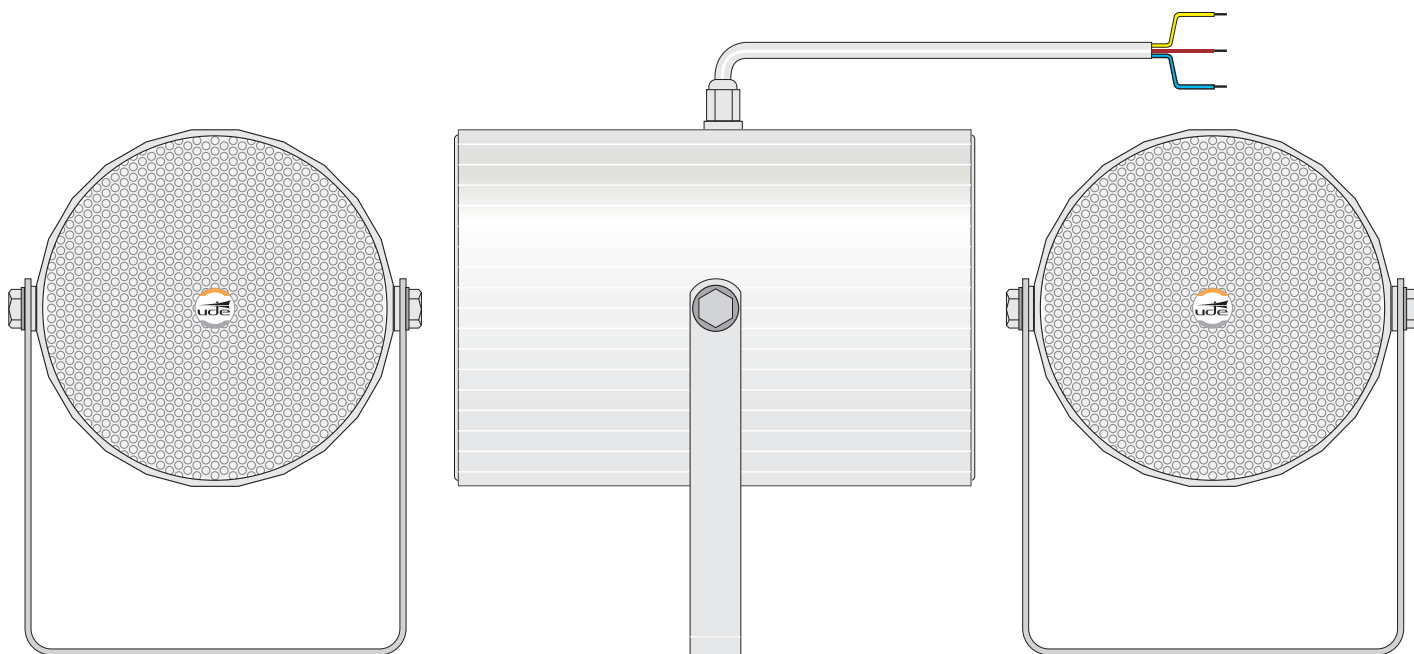

 Yellow	 Brown	 Blue
Common	15 w.	7,5 w.
L100V		
CE AP-751 ude		

DIMENSIONES EN MILIMETROS

DIMENSIONS IN MILLIMETRES

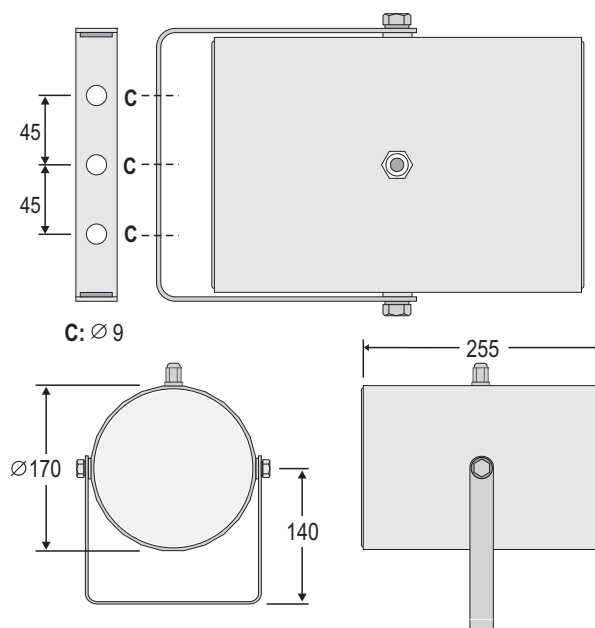

Altavoz bidireccional para palabra y música, de uso en interior y exterior, con transformador de línea incorporado. Resistente a la intemperie (IP-66).

CARACTERÍSTICAS TÉCNICAS

- Altavoz:	2 x 5".	- Material:	Aluminio.
- Potencia nominal (RMS):	15 W.	- Color:	Blanco
- Potencia L 100 V.:	15 - 7,5 W.	- Peso:	2,3 Kg.
- Banda pasante:	80 - 16.000 Hz.	- Escuadra fijación:	Aluminio.
- SPL (1 W/1 KHz/1 m):	93 dB.	- Tornillería:	Inox.
- Angulo de dispersión:	90°.	- Entrada cable:	Prensaestopas PG7.

Bidirectional speaker for voice and music purpose, for indoor and outdoor use, with line transformer built-in. Weather-resistant (IP-66).

TECHNICAL CHARACTERISTICS

- Speaker:	2 x 5".	- Material:	Aluminium.
- RMS Power:	15 W.	- Colour:	White.
- 100 V. Line power range:	15 - 7,5 W.	- Weight:	2,3 Kg.
- Bandwidth:	80 - 16.000 Hz.	- Support bracket:	Aluminium.
- SPL (1 W/1 KHz/1 m):	93 dB.	- Screws:	Stainless steel.
- Dispersion angle:	90°.	- Lead input:	Cable gland PG7.