

Main features

- When making a call, the IR-405 emits an audible signal at the same time as a ring, incorporated in the anti-vandal push button, lights up.
- Communication with the control station is hands-free. The talk / listen function is carried out from the control station.
- **The IR-405 can be installed indoors or outdoors.**
- **SOS and disability pictogram** to clearly indicate that the system is designed to be used by people with disabilities.
- Cover made of **brushed stainless steel**, which allows the IR-405 to be installed, both in stair shelter areas and in noble areas.

Description

The IR-405 is designed to be used with the elements of the **UDE INTERCOM-200 and SRD systems**.

It allows visual and acoustic signaling of calls made from different areas, as well as establishing two-way spoken intercom between each intercom and the central.

The main functions of the system are:

- Call system with memory.
- Visual and acoustic signaling of the call in the control center.
- Cancellation of the call from the control center.
- Allows transfer of call management to a DECT type telephone or to an analog telephone exchange, through the SW-18 module (optional).
- General public address call from the control center, using an additional amplifier and an adapter transformer reference 404.072 (optional).

The IR-405 incorporates an audible call alert, which on request can be adapted to a specific customer message.

Technical characteristics

Micro / Speaker with ferrite magnet and Mylar membrane for intercommunication with Central ID-200 or SR-200.

Anti-vandal call button, with call indicator ring.

Call information: Visual and auditory.

Electronic call module with retention system.

Pre-recorded message in non-volatile memory.

It incorporates a set of self-adhesive adjustment and sealing gaskets.


Front cover: 2mm stainless steel, brushed finish.

Measurements (W x H x D): 133 x 190 x 40 mm.

Boxes:

To embed in a solid partition: **UDE ref. CW-93** or **MEEV15 ref. V1500556**

Surface: Consult.

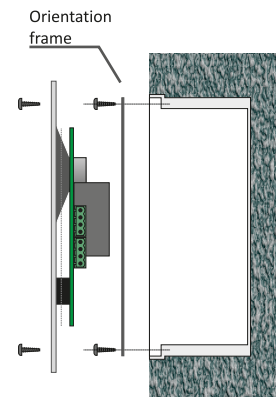


Embedded mounting
in solid partition
Box: Ref. UDE CW-93
(Not included)

Sealing gaskets

For a complete sealing of the equipment in outdoor areas, it is necessary to use on the back of the IR-405 front cover the self-adhesive gaskets included in the equipment.

Place the gaskets according to the following image:



Side gasket



Upper gasket



Lower gasket



Connection diagram

