




# IR-62/P

## EXPLOSION PROOF SECONDARY STATION FOR INTERCOM SYSTEMS



II 2GD  
Ex d IIB T3 Gb  
Ex t IIIC T85 °C Db  
-20 °C ≤ Ta ≤ +55°C

Certificate: LOM 10ATEX2049

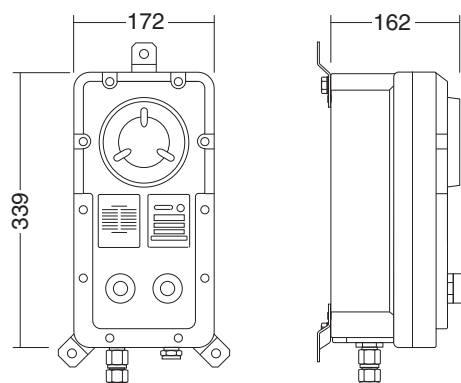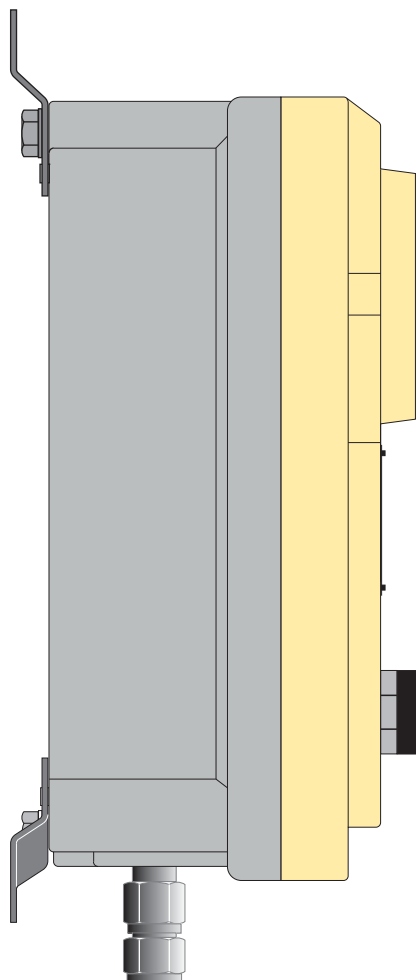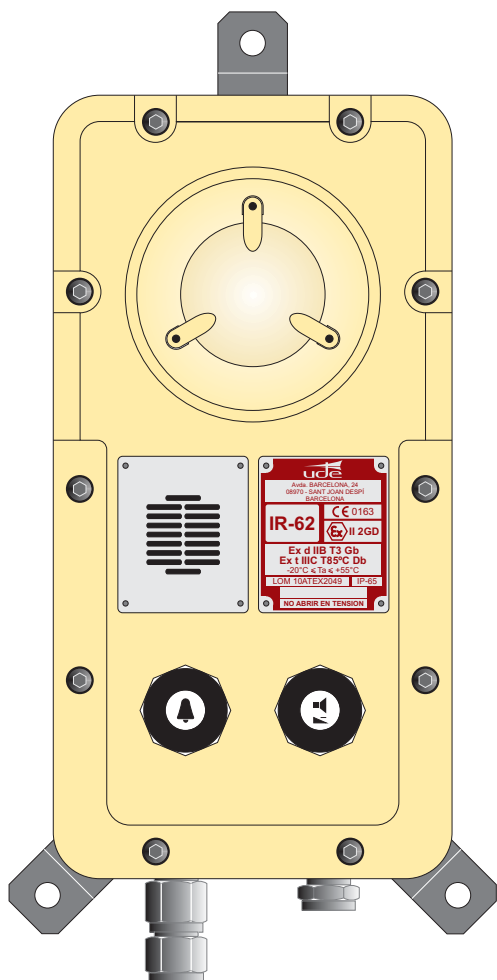

MEASUREMENTS IN MILLIMETRES

### TECHNICAL CHARACTERISTICS

- 30 W. power loudspeaker (16 Ω ).
- Dynamic microphone with antinoise system (200Ω ).
- Independent pushbutton for calling the centre.
- Attenuation push-button.
- Can be connected to an external loudspeaker.
- Cable input/output: NPT 3/4" cable gland.
- Weight: 11 k.
- Material: Cast aluminium.



EQUIPOS Y SISTEMAS MEGAFONÍA / INTERCOM • PUBLIC ADDRESS SYSTEMS

UNIÓN DESARROLLOS ELECTRÓNICOS

Tel.: +34 934 772 854 / +34 609 914 787 • ude@udeaudio.com • BARCELONA - SPAIN



[www.udeaudio.com](http://www.udeaudio.com)

rev.0 610.083A 1 / 2

## DESCRIPTION

The **IR-62/P** explosion proof secondary station for intercom systems has been developed as per the EN 50018 and EN 50281 standard for application in explosion-risk industrial and marine settings (**LOM 10ATEX2049 - certified**), which is valid for all European Union countries).

It can be used in atmospheres with gases classified in Groups **A** and **B**, with an ignition temperature above 200°C (**T3**), which means that the **IR-62/P** can be used in a great number of safety installations.

Surface temperature mark "T85°C" is applicable for areas with combustible dusts but without gaz.

Its function is to establish two-way spoken communication from the area where an explosion might occur and a radial intercom central. You may fit as many secondary stations as you require.

## APPLICATIONS


- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>- Petrochemical</li> <li>- Loading, unloading areas and gas storage</li> <li>- Gas pipelines (issuing and receiving stations).</li> <li>- Chemical industries</li> </ul> | <ul style="list-style-type: none"> <li>- Silos.</li> <li>- Methane tankers.</li> <li>- Oil tankers.</li> <li>- Oil rigs.</li> <li>- etc.</li> </ul> |
|---|---|

## COMPOSITION

**The equipment consists of:**

- High-performance 30 W message reception speaker, consisting of a compression driver and an exponential horn built into the structure.
- Microphone with noise-elimination circuit.
- Independent pushbutton for calling the centre.
- Internal speaker attenuation pushbutton and external loudspeaker override.
- Cast-aluminium surround housing.
- Outside screws in stainless steel.
- Cable input and output through NPT 3/4" stuffing-box (bottom).
- Wiring via screw-in terminals, on the inside.

## WIRING

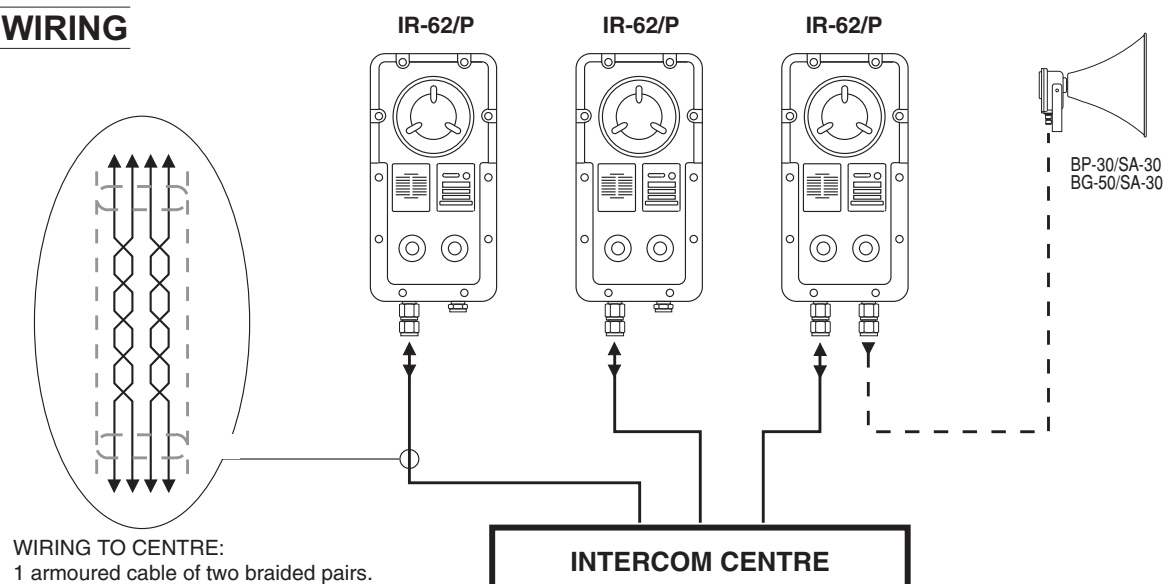

- FOR OTHER APPLICATIONS SEE: IR-62/1, IR-62/2, IR-62/3.