




Main characteristics


- ✓ Digital Voice Evacuation System remote paging microphone.
- ✓ 12 zone capacity microphone.
- ✓ System supports 32 remote microphones of loop connection.
- ✓ System indicators of AC, DC, fault, Mic status and test.
- ✓ 6 inputs & mic/line selection buttons.
- ✓ 6 zone selection buttons with three-colored indicators.
- ✓ Reset/Cancel, All Call & Call buttons.
- ✓ Two RJ45 ports for input and link output.
- ✓ CAT5 or CAT6 cable communication up to 600 meters.
- ✓ AC 230V and DC24V battery inputs.
- ✓ Built-in monitor speaker.

Front panel

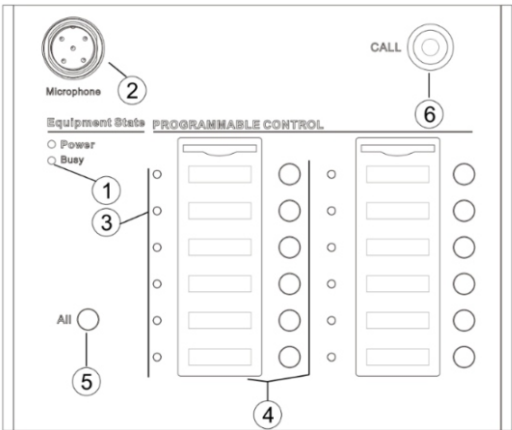

- 1. "Busy" device status indicator
- 2. Microphone input
- 3. Speaker Zone Status Indicators
- 4. Zone selection buttons
- 5. All zones selection button "ALL".
- 6. Voice announcement start button

Rear panel

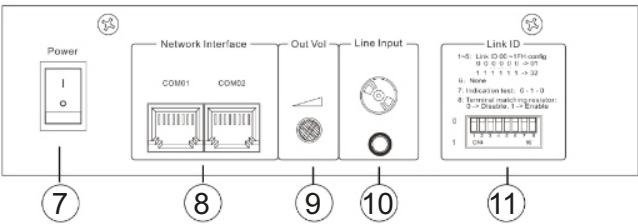

- 7. On / OFF Switch
- 8. Network interface communication
- 9. Microphone output sensitivity adjustment
- 10. Line input for external audio
- 11. Device ID configuration switch

Technical characteristics

Model	PZ-500
Description	Voice Alarm Remote Microphone
Power Consumption	3W
Zone Capacity	12 Zones
System Capacity	32 Remote microphones
Line Inputs	350mV, 10kΩ
Mic Input	5mV, 600Ω
Frequency Response	80Hz~16kHz
THD	<1% at RMS,1KHz
S/N Ratio	>70dB
Operating Temp	-20C° to +70C°
Power Supply	DC24V, ±20%
Humidity	<95% no condensation
Dimension	256(W)×149(H)×52(D) mm
Weight	1.5kg