


UDE's experience in the design of horn speakers has made it possible to make the **SD-40T** Driver, which is based on three pivotal characteristics: High Performance, Voice Intelligibility and Reliability. It also provides good music playback.

The **SD-40T** driver is coupled to the BP-30 and BG-50 exponential horns depending on the application.


- ✓ High performance
- ✓ Maximum mechanical and electrical resistance
- ✓ Penetrating sound that enhances voice
- ✓ Indoor and outdoor applications
- ✓ Long service life
- ✓ Reinforced phenolic resin moulded membrane
- ✓ Membrane auto-alignment device

- Rated power:	40 W. RMS.
- Impedance:	1k Ω , 500 Ω , 250 Ω .
- Frequency response:	160 at 11000 Hz.
- Sensitivity (*):	110 dB 1 W./1 m./1,5 KHz.
- Driver Horn coupling:	RW 1 3/8" (18 wires").
- Colour:	Anthracite grey and black.
- Membrane:	MSD-40T.
- Wiring:	Lead. Delivered with 1 m. long cable.
- IP rate:	IP-54.
- Dimensions:	ø 118 x 110 mm.
- Weight:	1,75 Kg.

(*): Coupled to the BG-50 horn

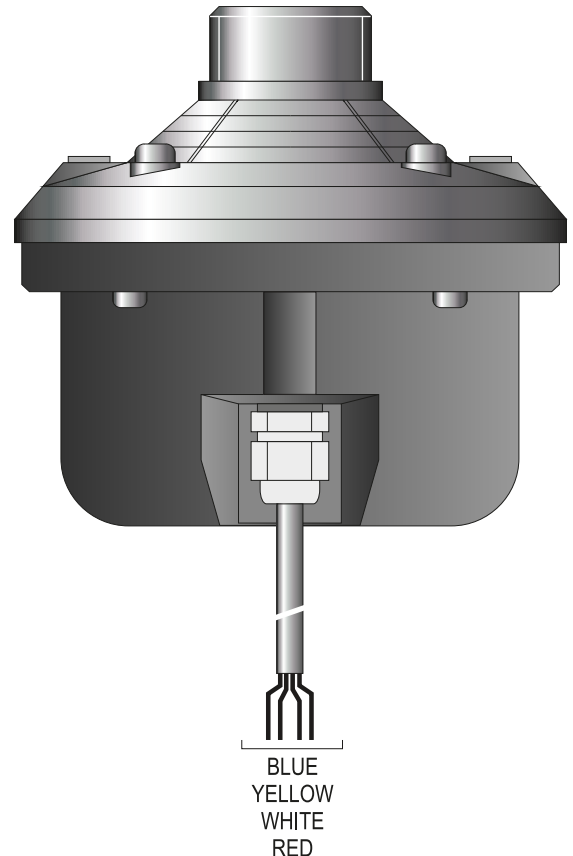

BLUE
YELLOW
WHITE
RED

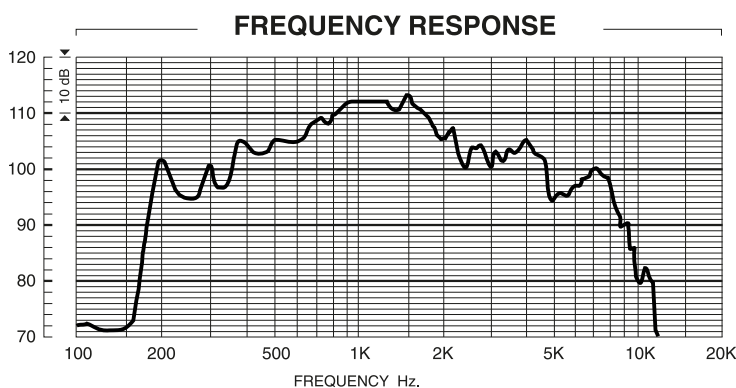

POWER SELECTION

L.100V			
+			-
40W	20W	10W	Común Commun Common
250 Ω	500 Ω	1 K Ω	
AZUL BLEU BLUE	AMARILLO JAUNE YELLOW	BLANCO BLANC WHITE	ROJO ROUGE RED