

SD-60T

Driver unit with line transformer





UDE's experience in the design of horn speakers has made it possible to make the **SD-60T** Driver, which is based on three pivotal characteristics: High Performance, Voice Intelligibility and Reliability. It also provides good music playback.

The **SD-60T** driver is coupled to the BP-30 and BG-50 exponential horns depending on the application.

- ✓ High performance
- ✓ Maximum mechanical and electrical resistance
- ✓ Penetrating sound that enhances voice
- ✓ Indoor and outdoor applications
- ✓ Long service life
- ✓ Reinforced phenolic resin moulded membrane
- ✓ Membrane auto-alignment device

- Rated power:	60 W. RMS.
- Impedance:	666 Ω , 333 Ω , 167 Ω .
- Frequency response:	160 at 11000 Hz.
- Sensitivity (*):	110 dB 1 W./1 m./1,5 KHz.
- Driver Horn coupling:	RW 1 3/8" (18 wires").
- Colour:	Anthracite grey and black.
- Membrane:	MSD-60T.
- Wiring:	Lead. Delivered with 1 m. long cable.
- IP rate:	IP-54.
- Dimensions:	ø118 x 110 mm.
- Weight:	1,80 Kg.

(*): Coupled to the BG-50 horn

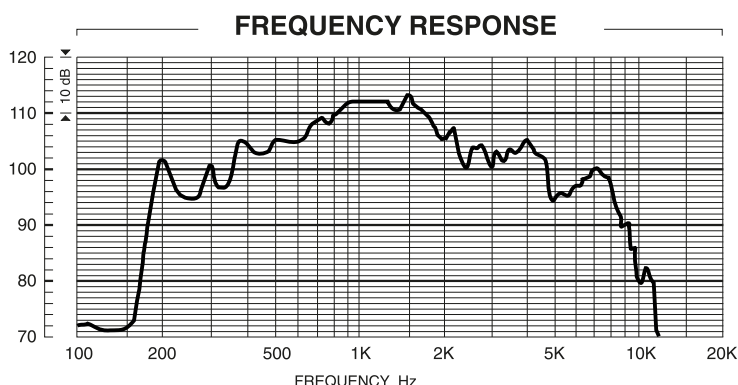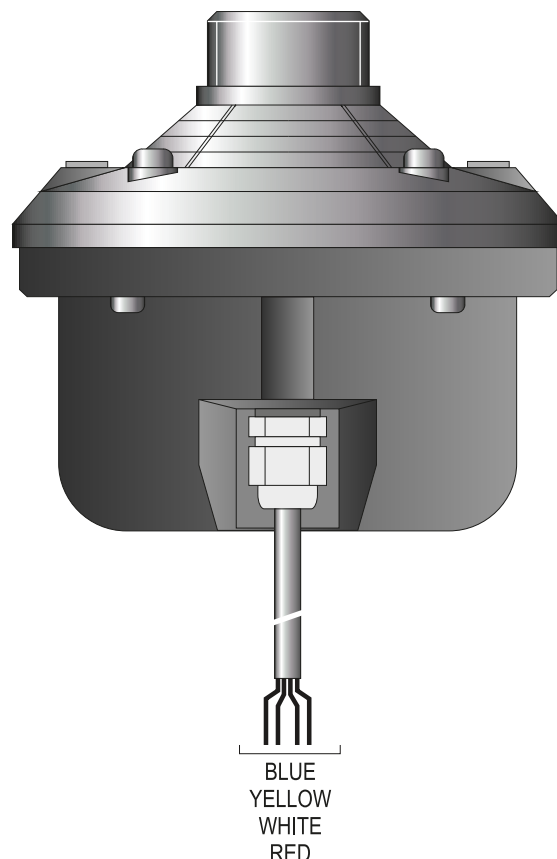

POWER SELECTION

L.100V			
+			-
60W	30W	15W	Común Commun Common
167 Ω	333 Ω	666 Ω	
AZUL BLEU BLUE	AMARILLO JAUNE YELLOW	BLANCO BLANC WHITE	ROJO ROUGE RED



EQUIPOS Y SISTEMAS MEGAFONÍA/INTERCOM • PUBLIC ADDRESS SYSTEMS

UNIÓN DESARROLLOS ELECTRÓNICOS

Tel.: +34 934 772 854 / +34 609 914 787 • ude@udeaudio.com • BARCELONA - SPAIN

www.udeaudio.com

rev.1 | 610.222a | 1 / 1