
## Cabinet loudspeaker





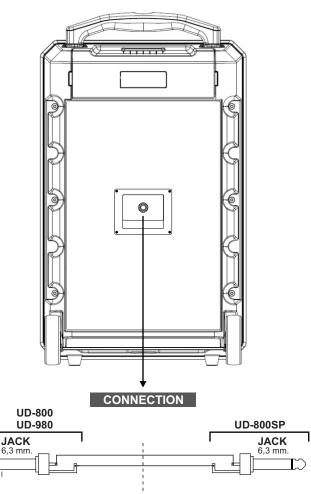

2 cables with a minimum cross-section of 1.5 mm<sup>2</sup> for distances shorter than 20 metres

## **DESCRIPTION**

The UD-800SP cabinet loudspeaker with a high audio performance and a good frequency response and low distortion. Can be the option for speech and music playing in big spaces, multi-purpose room, sport centers, auditoriums, railway stations, etc.

With adjustable pull out handle and wheels

Made to work with UD-800 and UD-980 equipments.

| TECHNICAL DATA   |           |  |
|--|-----------|--|
| - Speaker:   |           | 8".  |
| - Impedance:   |           | 4 ohms.                                      |
| - Rated power output:  |           | 70W. RMS                                     |
| - Sound pressure level (1W/1r  | m/1kHz):  | 91 dB SPL                                    |
| - Frequency response:  | 110       | Hz-15 kHz                                    |
| - Connection:  | Ja        | ck 6,3 mm.                                   |
| - Weight:  |           | 8,7 Kg.                                      |
| - Dimensions:  | 500 x 320 | x 290 mm.                                    |
| - Sound pressure level (1W/1r<br>- Frequency response:<br>- Connection:<br>- Weight: | 110<br>Ja | 91 dB SF<br>Hz-15 kH:<br>ick 6,3 mr<br>8,7 K |

## Note

The UD-800SP cabinet loudspeaker has the option to be installed wit TM-200 floor stand.



EQUIPOS Y SISTEMAS MEGAFONÍA/INTERCOM • PUBLIC ADDRESS SYSTEMS

UNIÓN DESARROLLOS ELECTRÓNICOS

www.udeaudio.com