


Speakers line control module with priority **AXD-129 / AXD-249**



Assembly instructions

- 1 - Disconnect the equipment from the electrical network.
- 2 - Remove the top lid of the equipment.
- 3 - Fit the WX-17 module into its housing using the screws supplied.
- 4 - Connect the WHITE (TM), RED (+25V) and BLACK (0V) cables as shown.
- 5 - Remove the B plug located next to the speaker terminals and run the 3 cables indicated as P, + and - through.
- 6 - Wire them as shown (see graphic).
- 7 - Replace the cover.

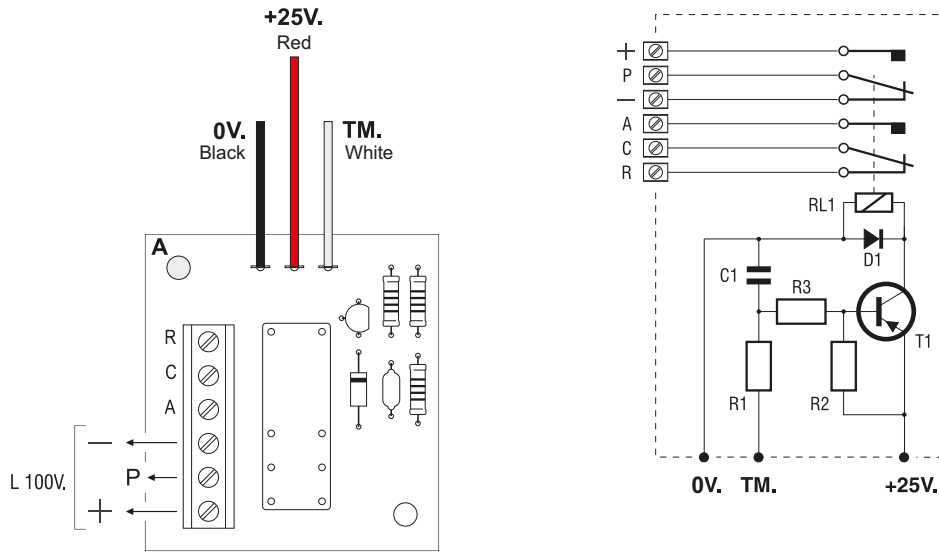